



**TYPE OF WORK:**

☒ RESIDENTIAL SUBDIVISION ☐ CONDO DEVELOPMENT

☐ COMMERCIAL DEVELOPMENT ☐ SERVICE

☐ OTHER \_\_\_\_\_

<p style="text-align: center;"><b>STAKING REQUIREMENTS:</b></p> <div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <input checked="checked" type="checkbox"/> SURVEYOR  <input type="checkbox"/> DESIGNER         </div> <div style="width: 45%;"> <input type="checkbox"/> STAKED  <input type="checkbox"/> NOT NEEDED         </div> </div>	<p style="text-align: center;"><b>MAIN / SERVICE IN EASEMENT:</b></p> <div style="display: flex; align-items: center;"> <input type="checkbox"/> YES         <div style="margin-left: 20px;">ROW WR# _____</div> </div>
---	---

RESTORE PRIVATE PROPERTY: ☐ WE ENERGIES ☒ CUSTOMER

CORROSION CONTACT: DANELLE FINK

PHONE #: 414-651-3067

MAIN SIZE, MAT'L, FT	INSTALL METHOD & FOOTAGE
2" PE 4,565'	TRENCH 4,485'
	BORE 80'

**RELATED WR's**

MAIN RETIREMENT WR \_\_\_\_\_ FOOTAGE \_\_\_\_\_

SERVICE REPLACEMENT WR \_\_\_\_\_ NO. \_\_\_\_\_

SERVICE RECONNECT WR \_\_\_\_\_ NO. \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

☒ IF DISTURBANCE OCCURS IN SUMMER, FINAL STABILIZATION SHALL BE PERMANENT SEED AND PROPERLY ANCHORED MULCH, UNLESS NOTED. IF DISTURBANCE OCCURS IN WINTER, TEMPORARY STABILIZATION SHALL BE SOIL STABILIZER, UNLESS NOTED. FINAL STABILIZATION IS REQUIRED IN SPRING.

☐ IF DISTURBANCE OCCURS WITHIN THE SLOPE INTERCEPT, FINAL STABILIZATION SHALL BE SOIL STABILIZER, UNLESS NOTED.

☐ IF DISTURBANCE OCCURS OUTSIDE THE SLOPE INTERCEPT, FINAL STABILIZATION SHALL BE PERMANENT SEED AND PROPERLY ANCHORED MULCH, UNLESS NOTED.

☐ IF DISTURBANCE OCCURS IN AGRICULTURAL FIELDS, SOIL SEGREGATION WILL NEED TO TAKE PLACE TO RETURN FIELDS TO PRE-CONSTRUCTION SOIL STRATIFICATION AND TO PRE-CONSTRUCTION ELEVATIONS.

☐ DEPENDING ON THE TIME OF YEAR AND WEATHER CONDITIONS, CONSIDER USING PLATES/MATS IN WETLANDS OR CROSSING DITCHES.

☒ STOCKPILE MATERIALS SHALL BE PLACED UPSLOPE FROM EXCAVATION. IF STOCKPILE MATERIALS MUST BE PLACED DOWNSLOPE OF EXCAVATION, PROTECT STOCKPILES WITH 12" WATTLES.

☐ PROJECT SPECIFIC EROSION CONTROL NOTES:

DEVELOPER:	
COMPANY NAME	TRI-QUIST INC
ADDRESS	8546 E COUNTRY CLUB TR
CITY, STATE	SCOTTSDALE, WI 85255
CONTACT NAME	CHIP HALQUIST
PHONE	602-369-8266
EMAIL	achiii@me.com


ENGINEER:

COMPANY NAME	SEH INC
ADDRESS	501 MAPLE AVE
CITY, STATE	DELAFIELD, WI
CONTACT NAME	KEITH KINDRED
PHONE	414-949-8919
EMAIL	KKINDRED@SEHINC.COM

NOTES:

- \* WE ENERGIES WILL NOT RESTORE OR HAUL SPOIL UNLESS OTHERWISE NOTED ON SKETCH
- \* CUSTOMER/DEVELOPER IS RESPONSIBLE FOR LOCATING ANY/ALL PRIVATE UNDERGROUND FACILITIES AND/OR OBSTRUCTIONS INCLUDING THOSE THAT HAVE NOT YET BEEN TURNED OVER TO THE MUNICIPALITY
- \* WE ENERGIES AND/OR ITS CONTRACTORS ARE NOT RESPONSIBLE FOR DAMAGE TO UNMARKED FACILITIES
- \* CUSTOMER/DEVELOPER AND THEIR CONTRACTORS/SUB-CONTRACTORS MUST KEEP WE ENERGIES EASEMENT AREAS FREE AND CLEAR OF OBSTRUCTIONS AND ENSURE ACCESS TO EASEMENT AREAS IS PROVIDED INCLUDING, BUT NOT LIMITED TO: DUMPSTERS, SPOIL, BACKFILL MATERIAL, ETC.
- \* CUSTOMER/DEVELOPER AND THEIR CONTRACTORS/SUB-CONTRACTORS MUST ENSURE THAT GRADE AT TIME OF WE ENERGIES INSTALLATION IS WITHIN 4" OF FINAL GRADE INCLUDING ANY PLANS FOR FUTURE LANDSCAPING
- \* ANY FIELD ADJUSTMENTS TO SIGNED/APPROVED SKETCH MAY RESULT IN ADDITIONAL COSTS INCURRED BY THE DEVELOPER
- \* WE ENERGIES IS NOT RESPONSIBLE FOR DAMAGE TO TREES AND/OR ROOTS LOCATED ALONG TRENCH ROUTE
- \* WE ENERGIES AND/OR ITS CONTRACTORS WILL CLEAN ANY MUD/DEBRIS THAT IS TRACKED ONTO EXISTING ROADS AS A RESULT OF THEIR CONSTRUCTION DAILY
- \* WE ENERGIES AND ITS CONTRACTORS ARE NOT RESPONSIBLE FOR COMPACTION ISSUES OR DAMAGES TO GRAVELED ROADS
- \* ANY ADDITIONAL SPECIAL NOTES OR PROVISIONS


CUSTOMER'S SIGNATURE OF APPROVAL	DATE
----------------------------------	------

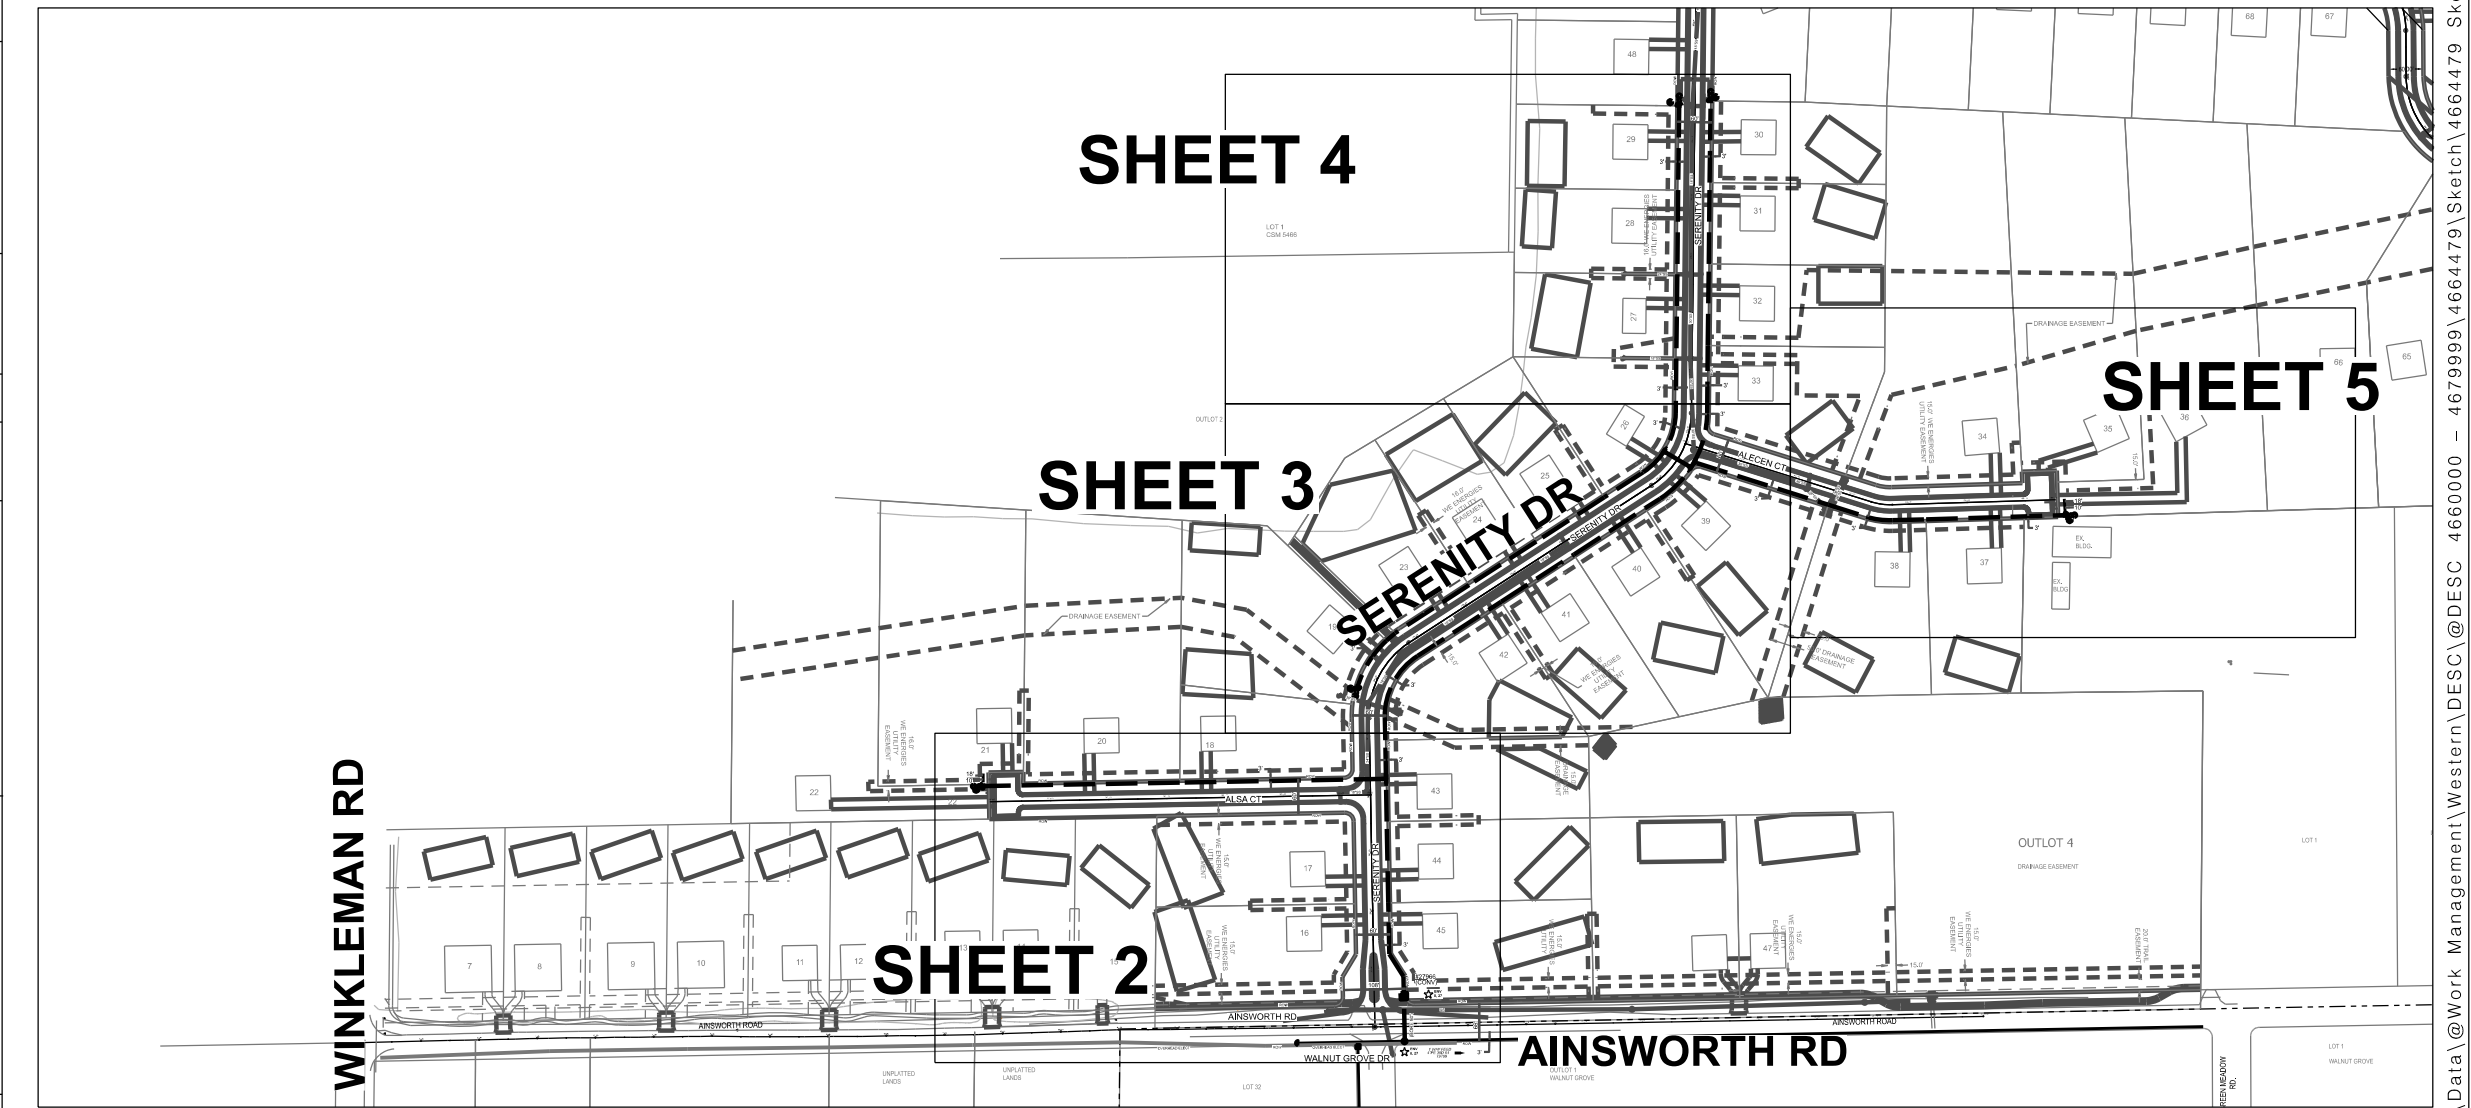

REV.	DESCRIPTION	BY	DATE
0	DESIGN APPROVED FOR CONSTRUCTION	DJL	9-28-21

Printed 10/1/2021 8:20:18 AM

SHEET 1 OF 3

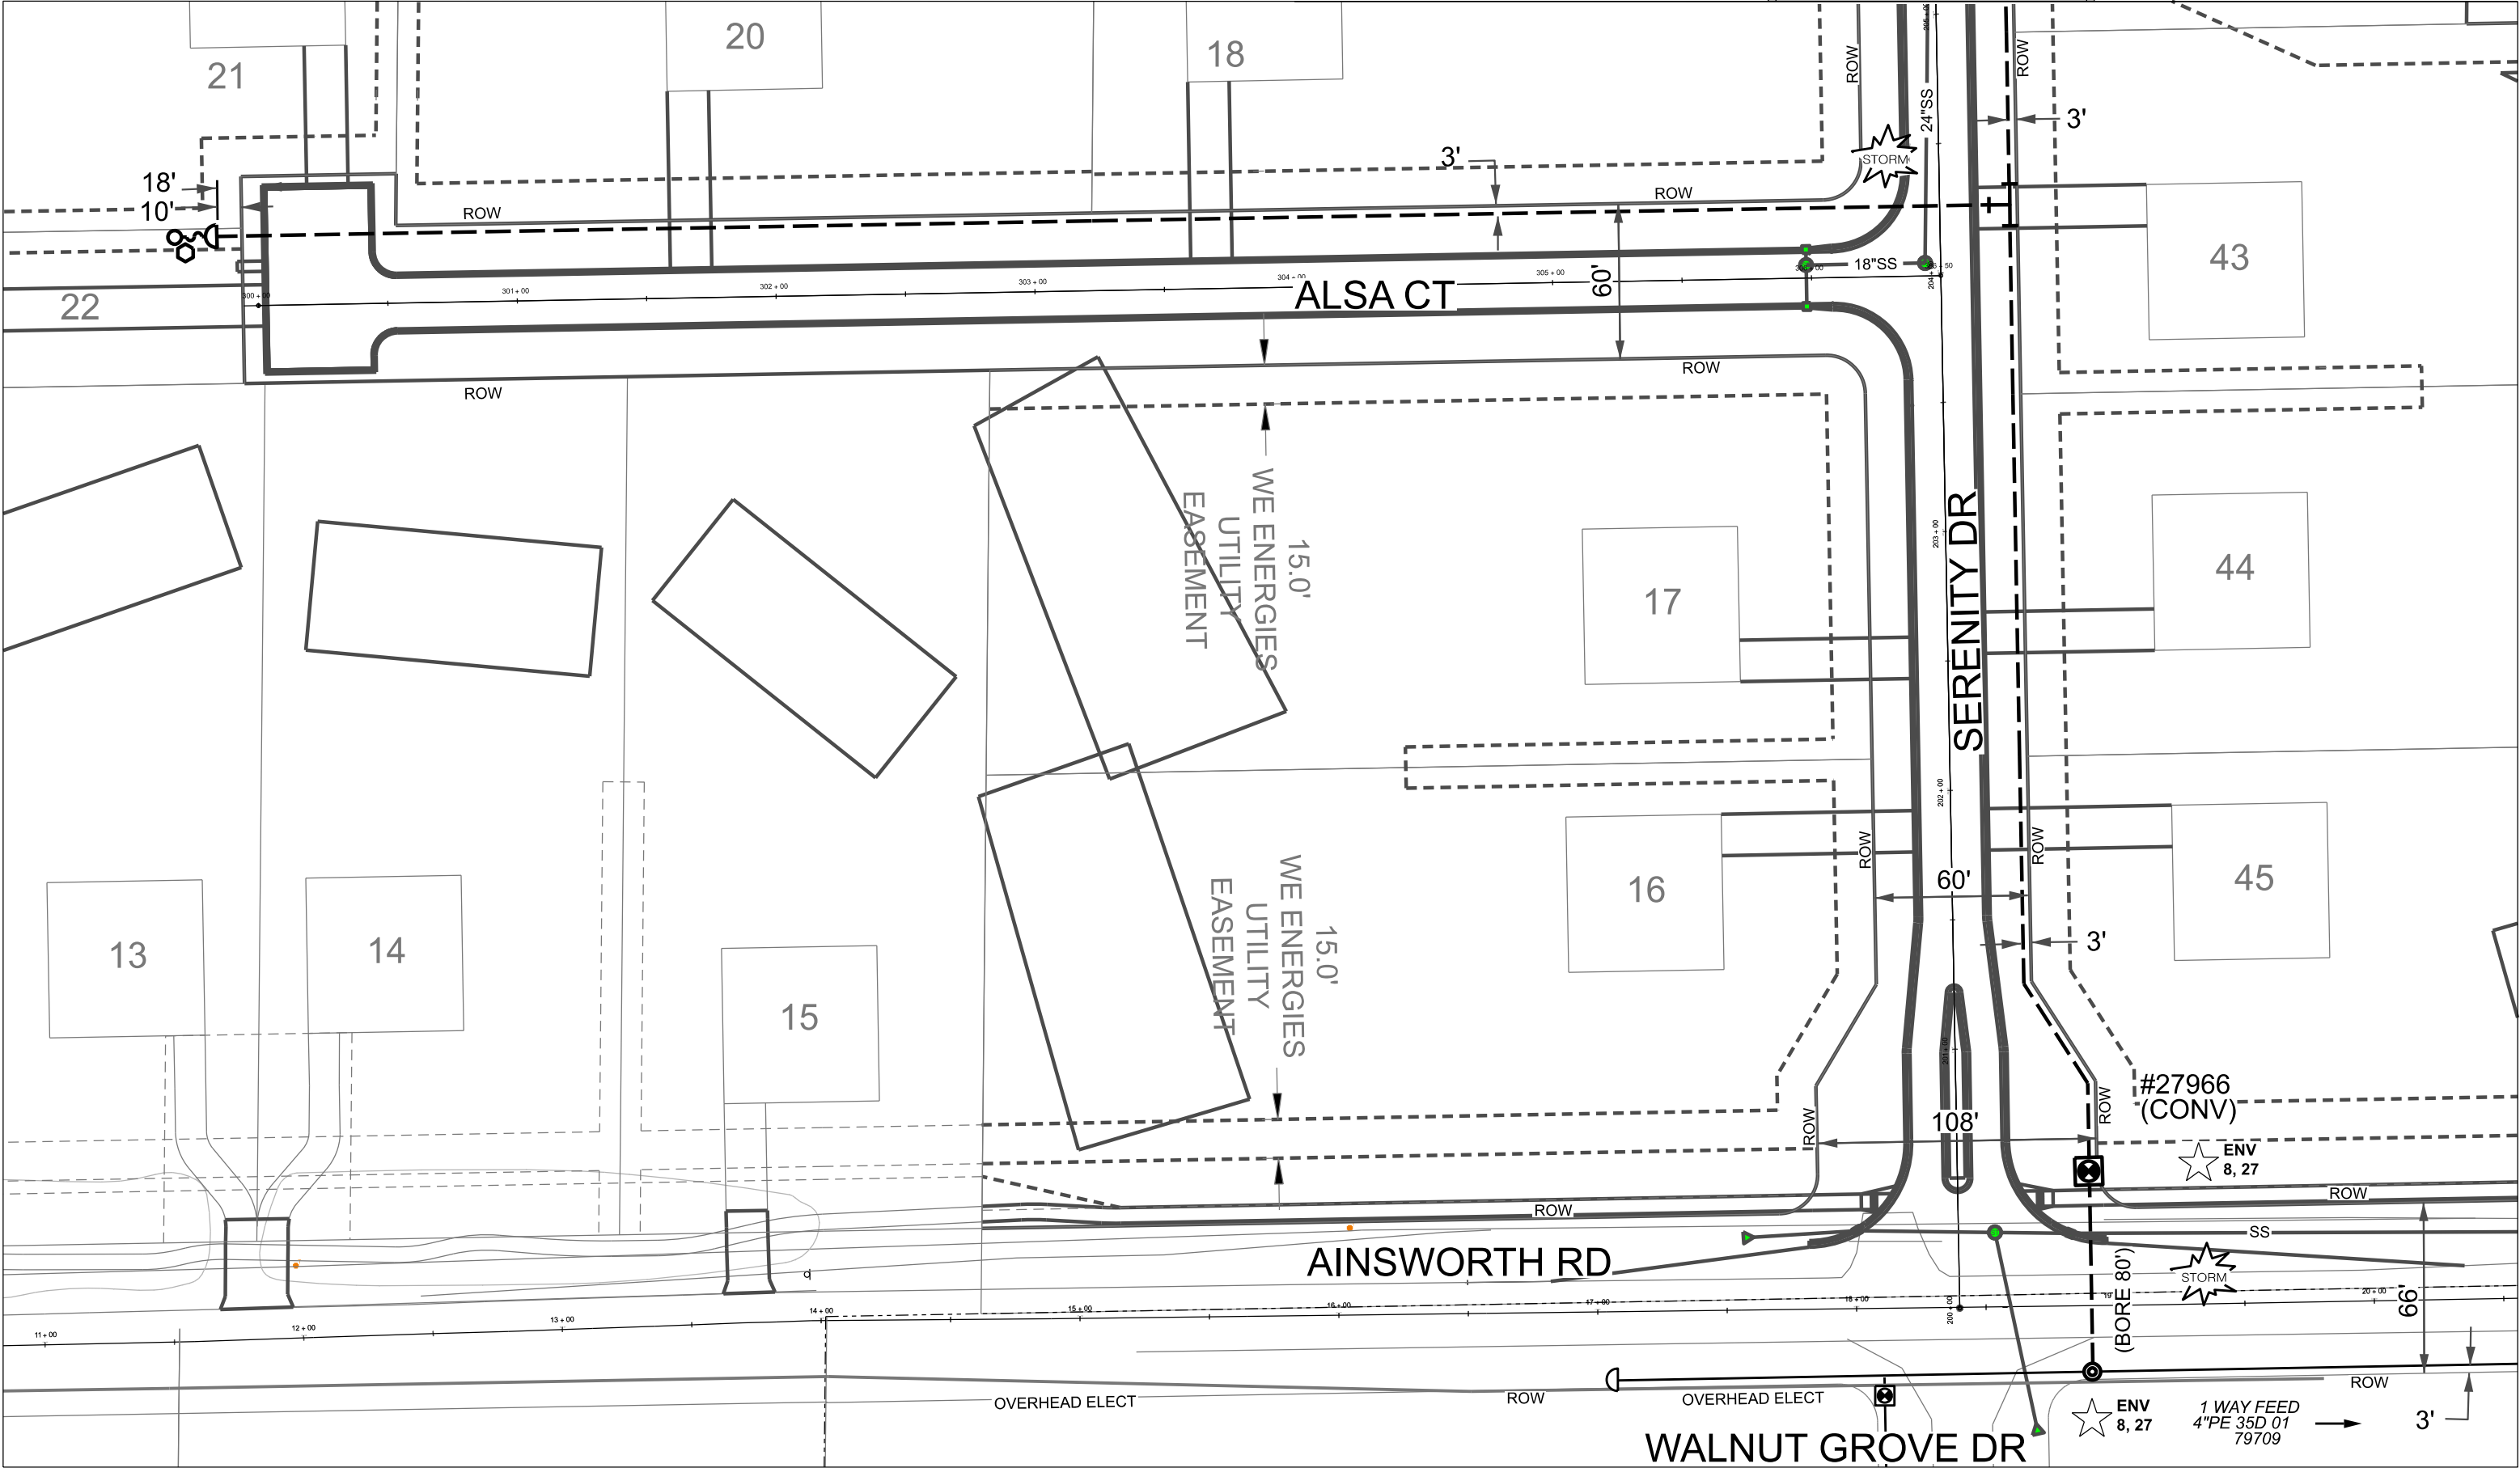

SHEET 3

ALSA CT

AINSWORTH RD

WALNUT GROVE DR

SERENITY DR

#27966 (CONV)

ENV 8, 27

STORM

ENV 8, 27

1 WAY FEED  
4"PE 35D 01  
79709


SCALE 1" - 50'

SHEET 2 OF 5



**SHEET 4**

**SHEET 5**

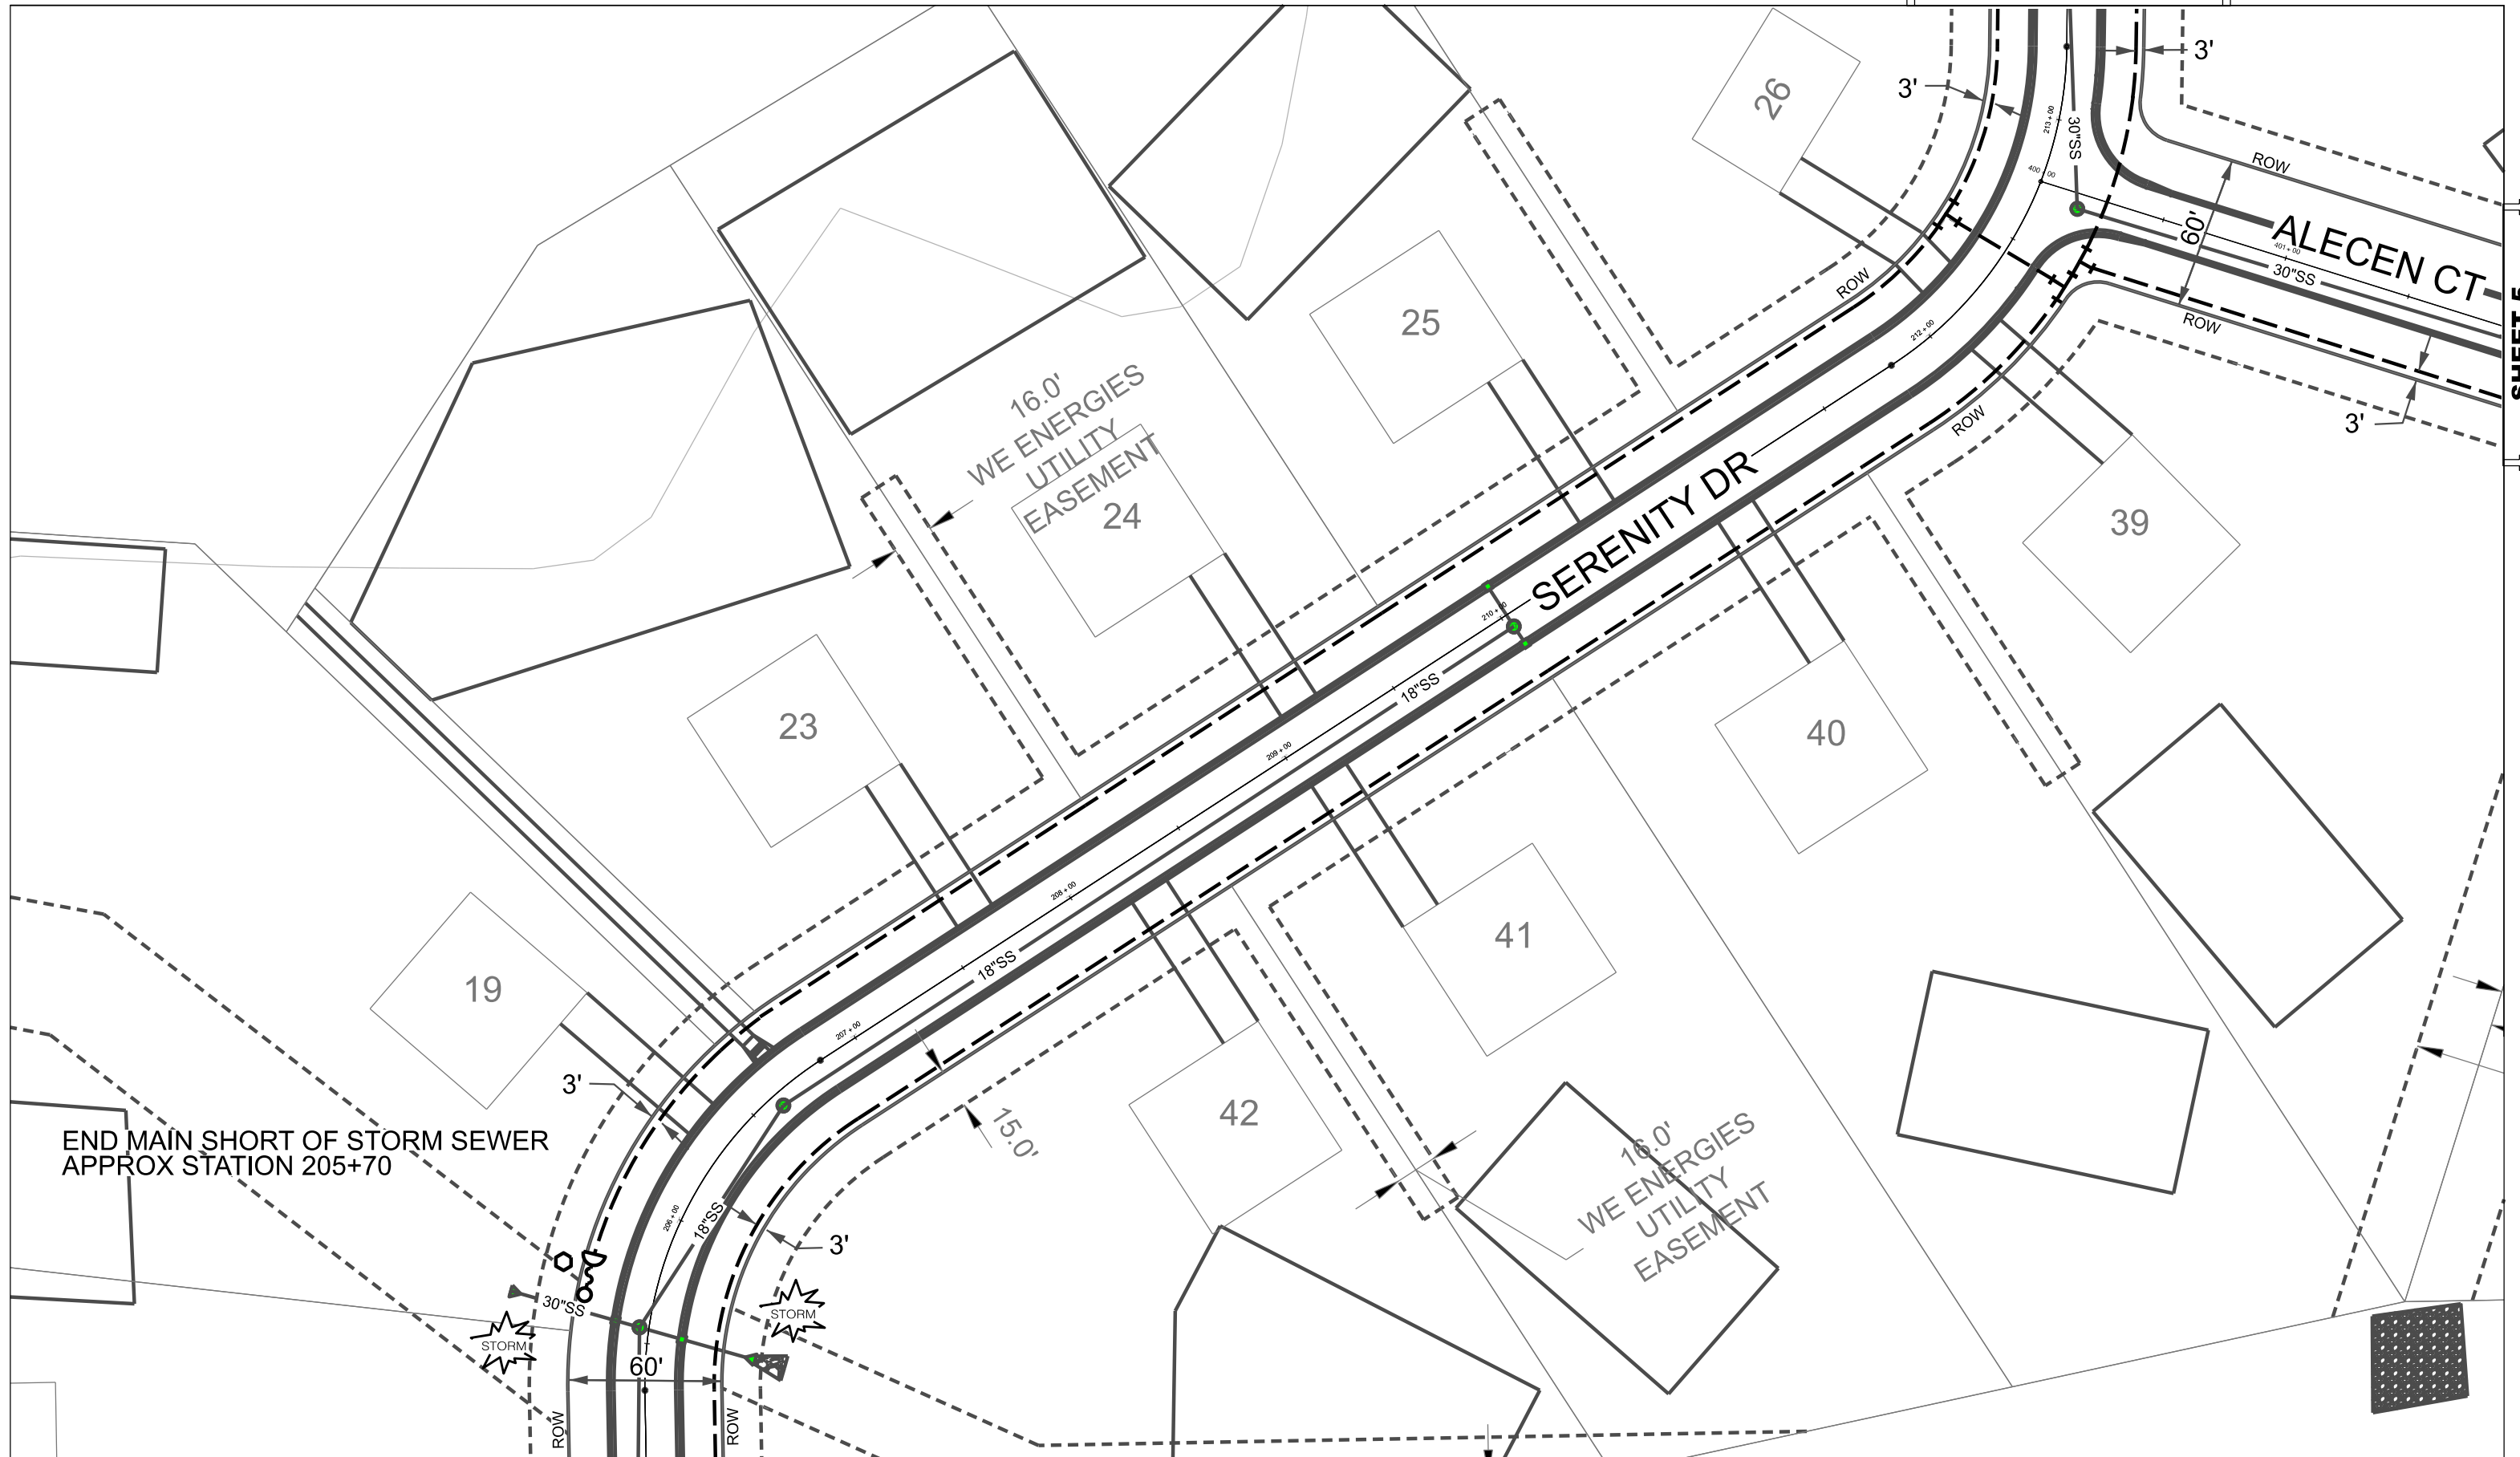


**SHEET 2**

SCALE 1" - 50'









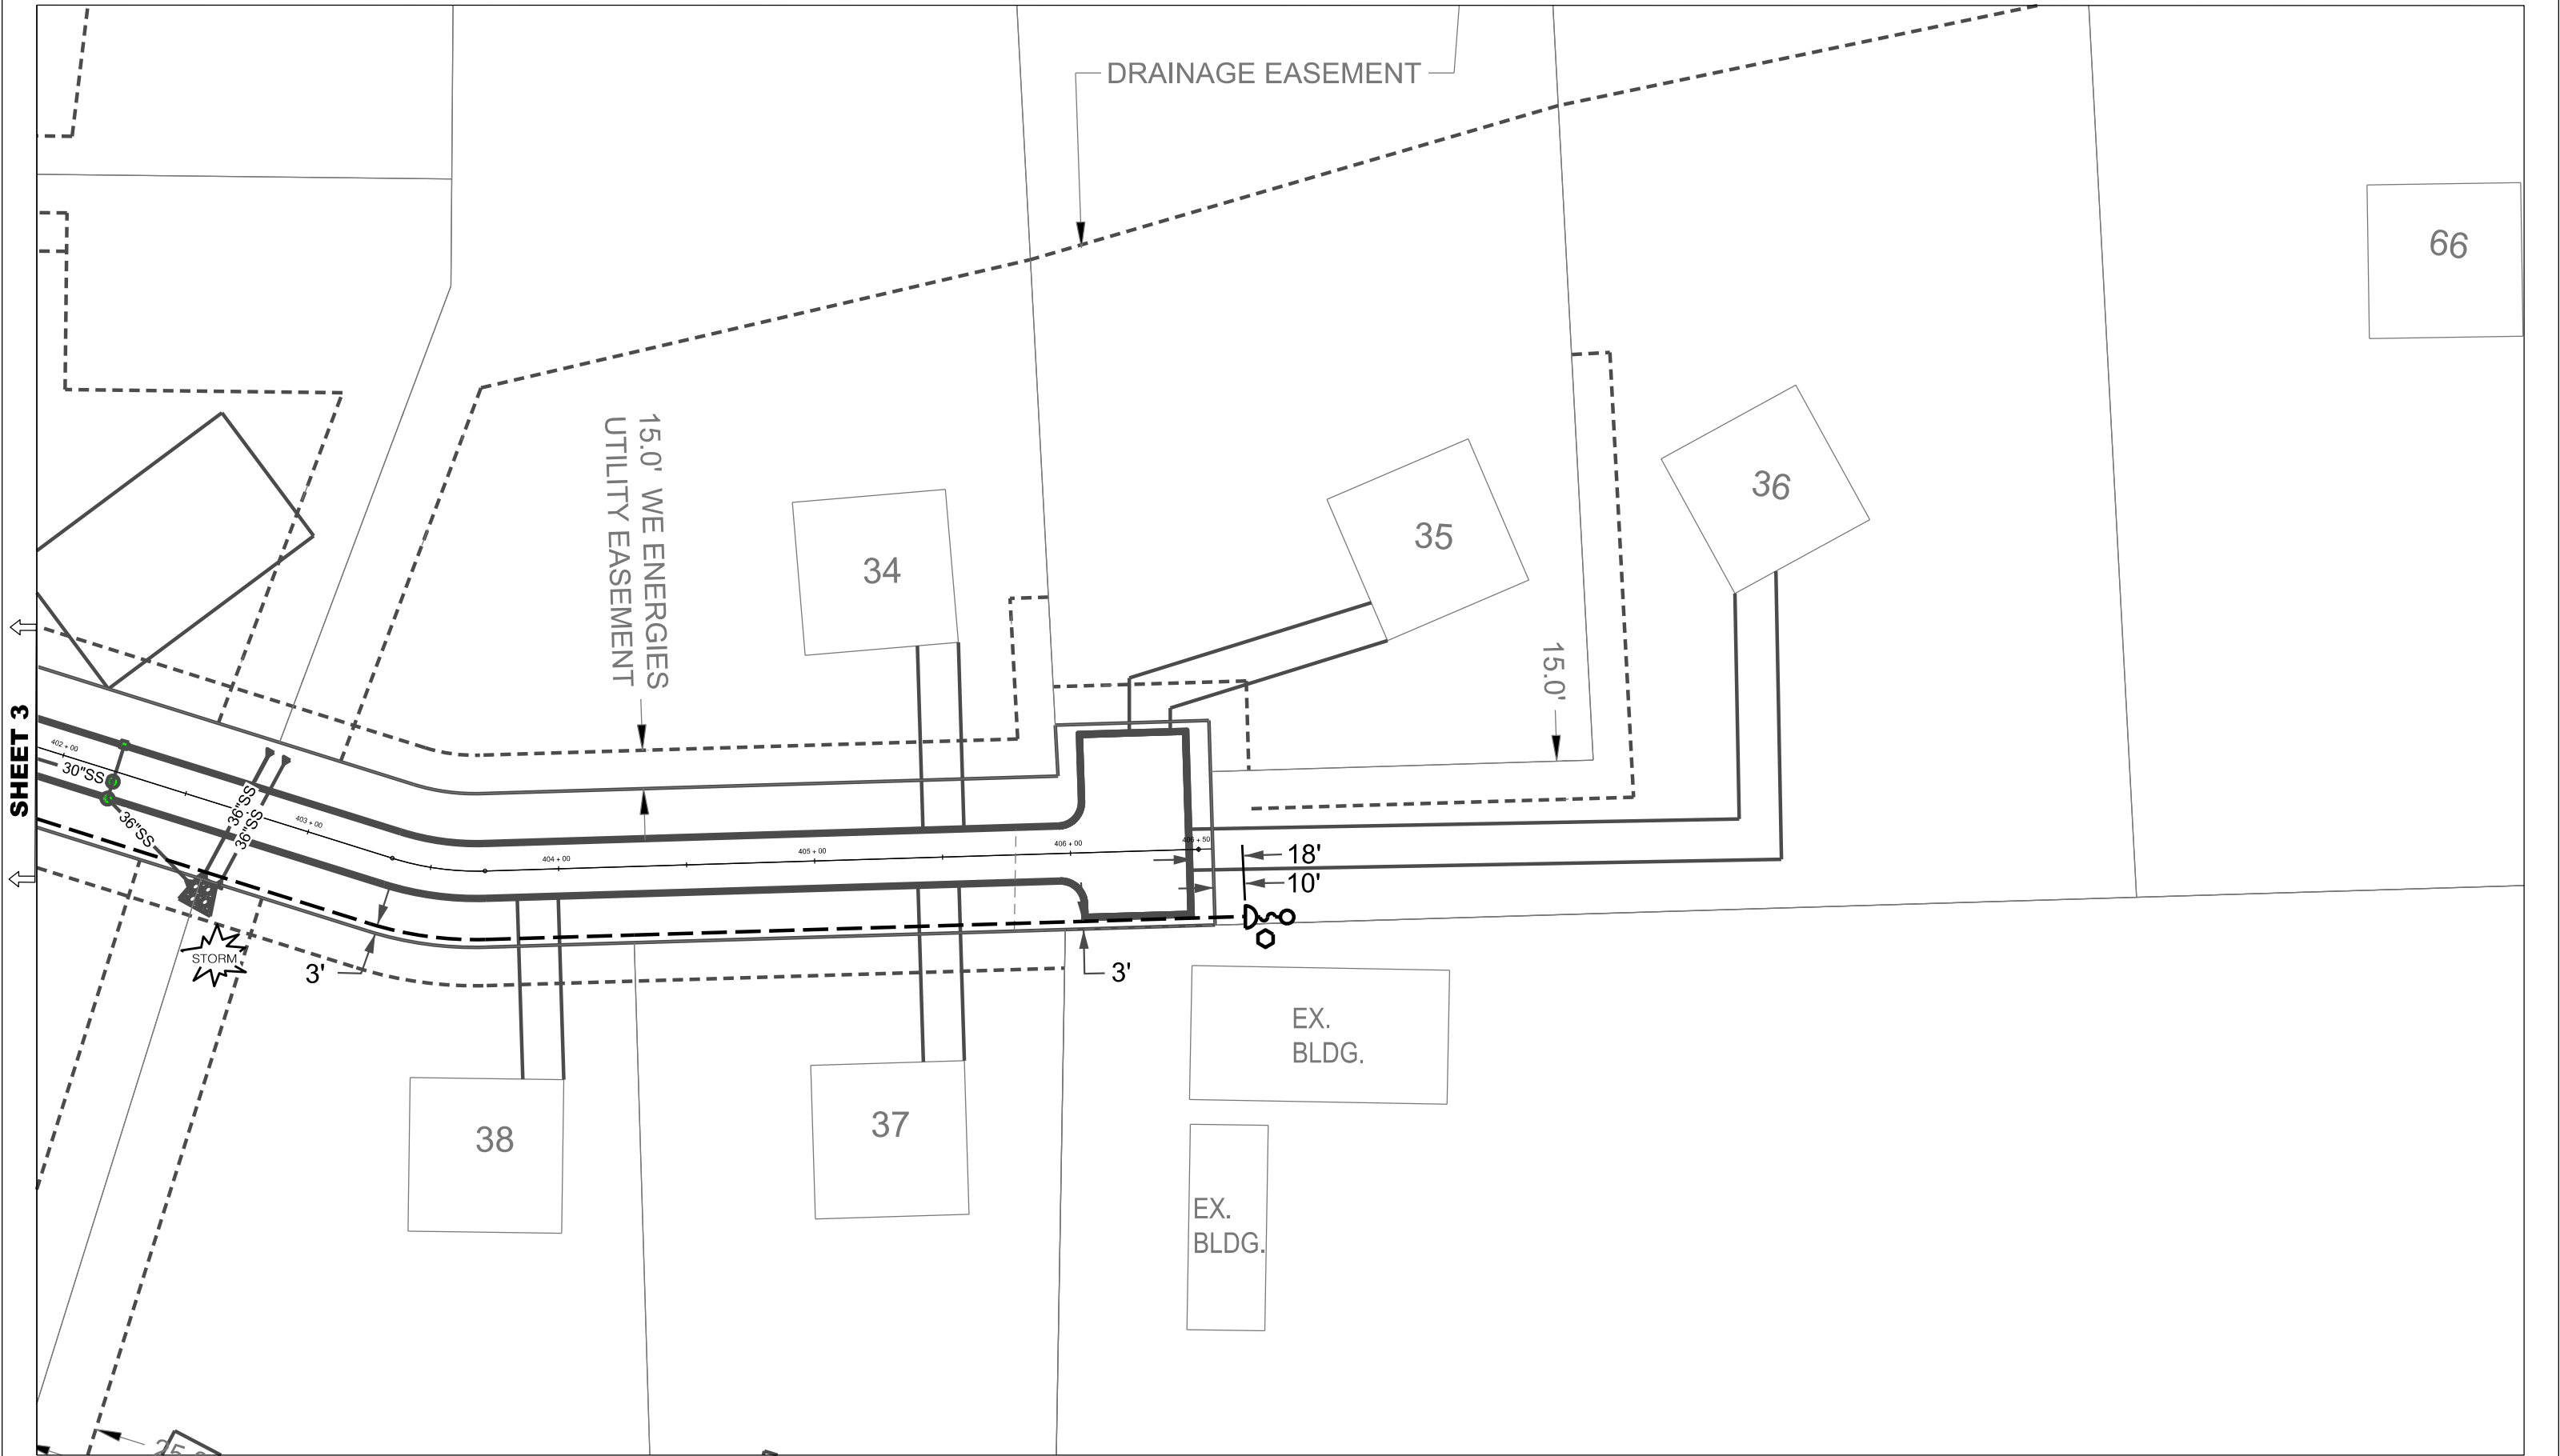














































SHEET 3 OF 5



SHEET 3





WE ENERGIES - GAS OPERATIONS		CONVENTIONAL SYMBOLS			
<div>NOTES:</div> <div>Existing facilities should be field verified prior to excavation.</div> <div>Utility information shown are from plans and have not been field verified.</div> <div>Maintain 12” min vertical clearance at crossing of existing electrical facilities.</div> <div>Maintain 6” min vertical clearance at crossing of other existing facilities.</div> <div>Maintain 18” min vertical clearance at crossing of existing storm sewer pipes.</div> <div>Maintain 5' clearance from storm sewer inlets.</div> <div>Staking of route or ROW by surveyor required prior to construction.</div> <div>Clearances shown are min distances – reference permit for specific clearance requirements.</div> <div>Additional information on excavation, backfilling &amp; clearances can be found in the Gas CRS 201.</div> <div>Restore all pavement, ROW, sidewalks, and customer's private property.</div>		M - Outside Meterset	 - Regulation Pit	 - Full Open Tee	 - Valve Pit
		 - Inside Meterset	 - Insulator	 - 45° Elbow	 - Regulation Station
		 - Valve (Boxed)	 - Bottom/Side/Half Line Stopper Fitting	 - 90° Elbow	 - Farm Tap
		 - Valve (Buried)	 - Save-A-Valve	 - Depth Change Elbow	 - Blow Down
		 - Transition Fitting	 - No Blow/Punch/HVTT/MVTT/EF Tee	 - Marker Post	 - Pressure Monitoring Device
		 - Reducer	 - Anode	 - Multi Wire Test Stand	 - Riser Used for Corrosion Reads
		 - Support Clamp or Squeeze Point	 - Cap with Anode	 - Single Wire Test Stand	 - Test Stand
		 - Coupling	 - Cap	 - Main Jump Symbol	 - Rectifier
		 - End of Main	 - Retirement Symbol	 - River Weight	 - Pressure Point
EROSION CONTROL LEGEND		WE ENERGIES WORK REQUEST ENVIRONMENTAL NOTES (Notes 1 through 7 apply to ALL work requests)			
	APPROXIMATE LOCATION FOR UNDERGROUND FACILITY EXCAVATION	<b>General</b>			
	INLET PROTECTION, TYPE A/B/C/D	1. If WDNR and/or USACE permits were obtained for the project, all permit conditions shall be met during construction of the project.			
	12" WATTLE or 12"/20" SEDIMENT LOG or 9.5"/20" EROSION EEL	<b>Erosion Control</b>			
	STONE DITCH CHECK	2. If soil disturbance occurs on slopes or channels/ditches leading to wetlands or waterways, or within wetlands, the disturbed areas shall be stabilized and appropriate erosion control Best Management Practices (BMP's) shall be implemented.			
	SAND or ROCK BAG	3. Erosion Control BMR's shall meet or exceed the approved WDNR Storm Watter Management Technical Standards ( <a href="http://dnr.wi.gov/topic/stormwater/standards/const_standards.html">http://dnr.wi.gov/topic/stormwater/standards/const_standards.html</a> ). Refer to We Energies Construction Site Sediment and Erosion Control Standards.			
	MULCH	4. Inspect installed erosion control BMP's at least one time per week and after ½" rain events: repair as necessary.			
	SOIL STABILIZER, TYPE B	5. When temporary stabilization is required (e.g. for winter or short-term construction) prior to final restoration, soil stabilizer shall be installed wherever possible. Erosion mat shall be used temporarily only where appropriate, in accordance with state standards, and when approved by the Operations Supervisor.			
	EROSION MAT CLASS I, TYPE A	<b>Contaminated Soils</b>			
	EROSION MAT CLASS I, TYPE B	6. Whenever soil exhibiting obvious signs of contamination (e.g., discoloration, petroleum or solvent odor, free liquids other than water, buried containers or tanks, or other obvious signs of environmental impacts) is encountered during excavation or installation, cease work immediately, take appropriate immediate precautions to ensure worker health and safety, and contact the Operations Supervisor or Inspector.			
	EROSION MAT CLASS I, TYPE A URBAN	<b>Spills</b>			
	EROSION MAT CLASS I, TYPE B URBAN	7. If an oil spill occurs during construction, call the Environmental Incident Response Team (EIRT) at 414-430-3478:			
	EROSION MAT CLASS II	a. Any quantity of oil is spilled into surface water;			
	EROSION MAT CLASS III	b. Any oil spill greater than 50 ppm PCB into a sewer, vegetable garden, or grazing land;			
	VEGETATIVE BUFFER	c. Any oil spill containing greater than 500 ppm PCB;			
	TRACKING PAD	d. Five gallons or more of oil spilled to the ground;			
	TIMBER MAT	e. Any oil spill involving a police department, fire department, DNR, or concerned property owner.			
	SILT FENCE	<b>Notes 8 through 27 apply as noted at specific points within each work request:</b>			
	APPROXIMATE DEWATERING BASIN LOCATION	<b>Dewatering</b>			
	SURFACE WATER FLOW	8. Dewatering of pits or trenches shall be done in accordance with state standards. Use an approved sediment bag, a straw bale dewatering basin, a combination of both, or equivalent.			
		<b>Wetlands</b>			
		9. As much as practicable, the majorityof the work shall be staged from the public roadways and road shoulders, keeping equipment out of adjacent wetlands.			
		10. All work shall be conducted to minimize soil disturance. No rutting will be allowed within the wetlands.			
		11. If soils are not frozen or stable to a point that avoids rutting, timber mats, mud tracks, or equivalent shall be utilized to access pole locations.			
		12. Excavated soils cannot be stockpiled in wetlands.			
					
		<b>Waterways</b>			
		13. All excess spoils shall be removed from wetlands and placed in a suitable upland location.			
		14. Trenching and pit excavations within wetlands shall include soil segregation to facilitate restoration of pre-construction soil stratification, and restoration to pre-construction elevations.			
		15. Poles scheduled to be removed, and that occur within wetland, shall be cut at the ground surface.			
		16. No work can be performed within the banks or below the ordinary high watermark of any navigable waterways/streams.			
		17. No crossing of navigable waterways with equipment can occur. Foot traffic is allowed.			
		18. Any disturbed soil within 75-feet of the ordinary high water mark of any navigable waterways/streams shall be stabilized within 24 hours of construction completion.			
		<b>Threatened and Endangered Species</b>			
		19. Threatened or endangered species are known to occur in the work area. It is illegal to harass, harm, or kill a protected species under state and federal regulations. Proper precautions shall be taken to ensure harm to individuals is avoided.			
		20. In order to protect the threatened or endangered species, work must be conducted between November 5 and March 15.			
		21. Exclusion fencing must be installed at the work area prior to March 15.			
		22. A qualified biologist must be present when conducting work at this location.			
		<b>Invasive Species</b>			
		23. State regulated invasive species are known to occur in the work area. Reasonable precautions are legally required to prevent the spread of these species. The Wisconsin Council on Forestry Transportation and Utility Rights-of Way Best Management Practices should be followed: ( <a href="http://council.wisconsinforestry.org/invasives/transportation/">http://council.wisconsinforestry.org/invasives/transportation/</a> ).			
		<b>Cultural and Historical Resources, cont.</b>			
		24. The project is within or adjacent to an area that is identified by the State of Wisconsin as potentially having Native American artifacts, burial mounds or burial sites, which could be encountered during construction.			
		25. If human bone or any artifacts are discovered during construction, work must cease immediately. Contact the Environmental Department who will contact the State Burial Sites Preservation Office and determine the next steps that must be taken in order to comply with state law. Work at that site MAY NOT PROCEED until the Environmental Department authorizes it.			
		26. A "qualified archaeologist," as specified under Wis. Stats 157.70 (1) (i) and Wis. Admin. Code HS 2.04 (6), must be present to monitor all ground disturbing activities.			
		<b>Frac-out Contingency Plan</b>			
		27. A frac-out contingency plan shall be on-site and implemented accordingly. The contingency plan shall incorporate the following components.			
		a. Continuously inspect the bore paths for frac-outs in order to respond quickly and appropriately.			
		b. Containment materials (e.g. silt fence, straw bales, sand bags, etc.) shall be on site and available should a frac-out occur.			
		APPENDIX A			